

**Anritsu** envision : ensure

# ShockLine™ Modular Vector Network Analyzers

## MS46131A

1 MHz to 43.5 GHz



## Introduction

The MS46131A is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is a modular 1-port VNA that is configurable as single or dual 1-port VNAs controlled from a single PC. The MS46131A is available in three frequency ranges: 1 MHz to 8/20/43.5 GHz, and is capable of S-parameter and time domain measurements.

The 1-port MS46131A is based on patented ShockLine™ VNA-on-chip technology, which simplifies the internal VNA architecture at high frequencies, reduces instrument cost, and enhances accuracy and measurement repeatability. The combination of low cost and good performance make ShockLine™ VNAs ideal candidates for testing 1-port RF and microwave passive devices to 43.5 GHz.

The MS46131A series is controlled through USB from an external PC. The MS46131A runs the same software as the rest of the ShockLine family, providing a powerful graphical user interface for debugging and manual testing of devices. The software also has comprehensive remote programming support for automated test applications.

This document provides detailed specifications for the MS46131A series Vector Network Analyzers and related options.

## Instrument Models and Operating Frequencies

Base Model

- MS46131A, 1-Port ShockLine VNA

Requires one Frequency Option

- MS46131A-010, 1 MHz to 8 GHz
- MS46131A-020, 1 MHz to 20 GHz
- MS46131A-043, 1 MHz to 43.5 GHz

## Principal Options

- MS46131A-002, Time Domain



MS46131A-043 1-Port ShockLine Modular VNA

**Table of Contents**

Definitions . . . . . 4

High Level Noise . . . . . 5

Receiver Compression Levels . . . . . 5

Output Power Settings . . . . . 5

Measurement Stability . . . . . 5

Frequency Resolution, Accuracy, and Stability . . . . . 5

Uncorrected (Raw) Port Characteristics . . . . . 5

MS46131A-010 VNA System Performance with Manual Cal Kits . . . . . 6

MS46131A-020 VNA System Performance with Manual Cal Kits . . . . . 7

MS46131A-043 VNA System Performance with Manual Cal Kits . . . . . 8

MS46131A-043 VNA System Performance with Manual Cal Kits . . . . . 9

MS46131A-010 VNA System Performance with SmartCal™ . . . . . 10

MS46131A-010 VNA System Performance with SmartCal™ . . . . . 11

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™ . . . . . 12

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™ . . . . . 13

MS46131A-043 VNA System Performance with Precision AutoCal™ . . . . . 14

Standard Capabilities . . . . . 15

Calibration and Correction Capabilities . . . . . 17

Optional Capabilities . . . . . 17

Remote Operability . . . . . 17

Standard Device Connections . . . . . 18

MS46131A Top Panel . . . . . 18

MS46131A Bottom Panel . . . . . 19

Recommended External PC Configuration . . . . . 19

Mechanical . . . . . 19

Regulatory Compliance . . . . . 19

Environmental . . . . . 19

Warranty . . . . . 19

Ordering Information . . . . . 20

**Definitions**

|                                  |                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | All specifications and characteristics apply under the following conditions, unless otherwise stated:<br>MS46131A base model, revision 1                                                                                                              |
| Warm-Up Time                     | After 60 minutes of warm-up time, where the instrument is left in the ON state.                                                                                                                                                                       |
| Temperature Range                | Over the 25 °C ± 5 °C temperature range.                                                                                                                                                                                                              |
| Error-Corrected Specifications   | Specifications are valid over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature.<br>Error-corrected specifications are warranted and include guard-bands, unless otherwise stated.                                                     |
| Frequency Bands in Tables        | When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.                                                                                                          |
| User Cables                      | Specifications do not include effects of any user cables attached to the instrument.                                                                                                                                                                  |
| Discrete Spurious Responses      | Specifications may exclude discrete spurious responses.                                                                                                                                                                                               |
| Internal Reference Signal        | All specifications apply with the internal 10 MHz frequency reference.                                                                                                                                                                                |
| Interpolation Mode               | All specifications are with Interpolation Mode Off.                                                                                                                                                                                                   |
| Standard                         | Refers to instruments without Options.                                                                                                                                                                                                                |
| Typical Performance              | Typical performance indicates the measured performance of an average unit.<br>It does not include guard-bands and is not covered by the product warranty.<br>Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical. |
| Characteristic Performance       | Characteristic performance indicates a performance designed-in and verified during the design phase. It is not covered by the product warranty.                                                                                                       |
| Recommended Calibration Cycle    | 12 months (Residual specifications also require calibration kit calibration cycle adherence.)                                                                                                                                                         |
| Instrument Grounding             | For optimum performance and ESD protection, the AC power cord to the external power supply should be plugged into a AC socket with a ground. If this is not possible, the ground receptacle on the MS46131A can be used to ground the chassis.        |
| Specifications Subject to Change | All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: <a href="http://www.anritsu.com">www.anritsu.com</a>                                                                         |

The instrument may be protected by one or more of the following patents: 6894581, 7088111, 7545151, 7683633, 7924024, 8417189, 8718586, 10116432, 9967085, 9964585, 9860054, 9733289, and 9366707, depending upon the model and option configuration of the instrument.

**High Level Noise**

1-Port: Measured at 100 Hz IF bandwidth and at High power level, RMS.

| Frequency            | Magnitude (dB)        | Phase (deg)         |
|----------------------|-----------------------|---------------------|
| 1 MHz to 8 GHz       | 0.009 (0.003 typical) | 0.12 (0.03 typical) |
| > 8 GHz to 40 GHz    | 0.006 (0.001 typical) | 0.1 (0.02 typical)  |
| > 40 GHz to 43.5 GHz | 0.009 (0.002 typical) | 0.12 (0.03 typical) |

**Receiver Compression Levels**

Port power level beyond which the response may be compressed more than 0.1 dB. Performance is typical.

| Frequency Range   | Standard (dBm) |
|-------------------|----------------|
| 1 MHz to 43.5 GHz | + 5            |

**Output Power Settings**

Performance is typical.

| Power Setting  | Standard        |
|----------------|-----------------|
| High (default) | 0 dBm (±2dB)    |
| Low            | - 20 dBm (±2dB) |

**Measurement Stability**

Performance is typical

| Frequency         | Magnitude (dB/°C) | Phase (deg/°C) |
|-------------------|-------------------|----------------|
| 1 MHz to 43.5 GHz | 0.02              | 0.3            |

**Frequency Resolution, Accuracy, and Stability**

| Resolution | Accuracy                              | Stability                                | Aging                   |
|------------|---------------------------------------|------------------------------------------|-------------------------|
| 1 Hz       | ± 1.0 ppm<br>(at time of calibration) | ± 1.0 ppm from -10 °C to +55 °C, typical | ± 1.0 ppm/year, typical |

**Uncorrected (Raw) Port Characteristics**

User and System Correction Off. All specifications are typical.

| Frequency Range     | Directivity (dB) | Port Match (dB) |
|---------------------|------------------|-----------------|
| 1 MHz to 8 GHz      | > 6              | > 6             |
| > 8 GHz to 43.5 GHz | > 10             | > 10            |

MS46131A-010 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With calibration using TOSLN50A-8 or TOSLNF50A-8 N type connector calibration kits.

| Frequency Range  | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 6 GHz   | ≥ 42             | ≥ 33              | ± 0.15                                |
| > 6 GHz to 8 GHz | ≥ 37             | ≥ 33              | ± 0.15                                |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

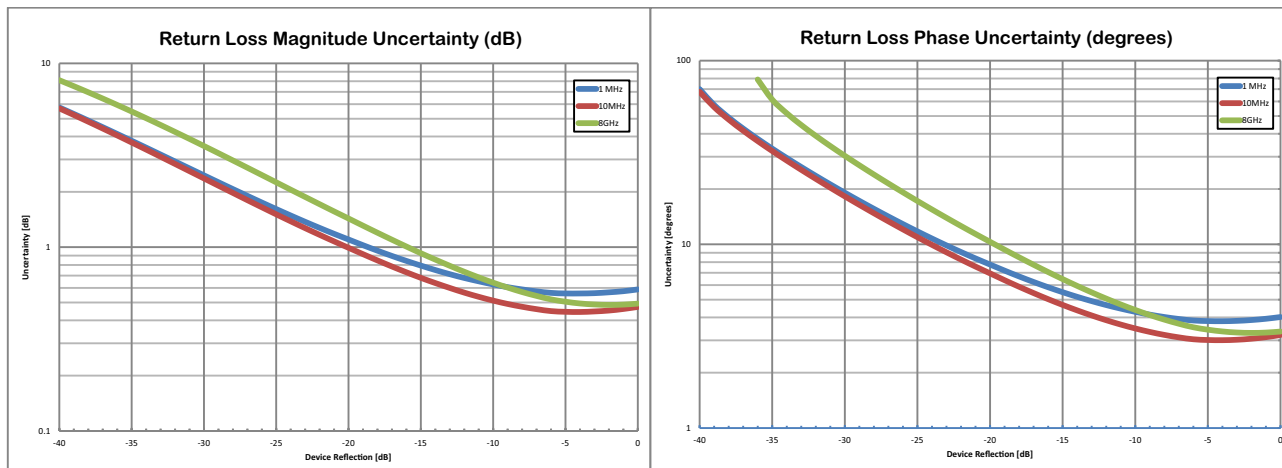

MS46131A-020 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With calibration using the TOSLK50A-20 or TOSLKF50A-20 K type connector calibration kits.

| Frequency Range    | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|--------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 10 GHz    | ≥ 42             | ≥ 33              | ± 0.15                                |
| > 10 GHz to 20 GHz | ≥ 36             | ≥ 26              | ± 0.15                                |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

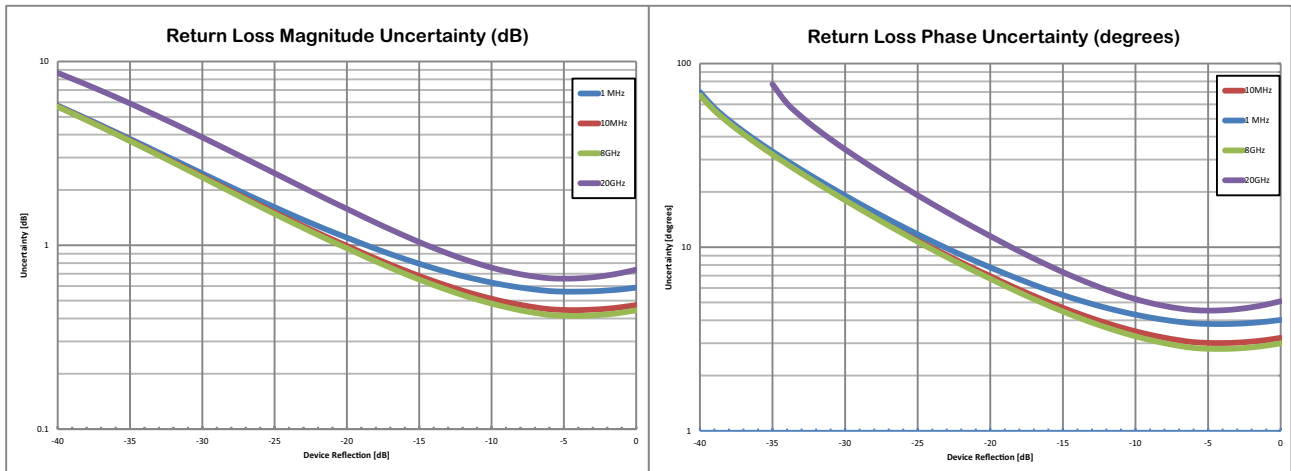

MS46131A-043 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With calibration using TOSLK50A-43.5 or TOSLK50A-43.5 K type connector calibration kits with generic calibration coefficients.

| Frequency Range      | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|----------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 10 GHz      | ≥ 42             | ≥ 33              | ± 0.15                                |
| > 10 GHz to 20 GHz   | ≥ 36             | ≥ 26              | ± 0.15                                |
| > 20 GHz to 30 GHz   | ≥ 32             | ≥ 22              | ± 0.15                                |
| > 30 GHz to 40 GHz   | ≥ 30             | ≥ 20              | ± 0.15                                |
| > 40 GHz to 43.5 GHz | ≥ 28             | ≥ 20              | ± 0.2                                 |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

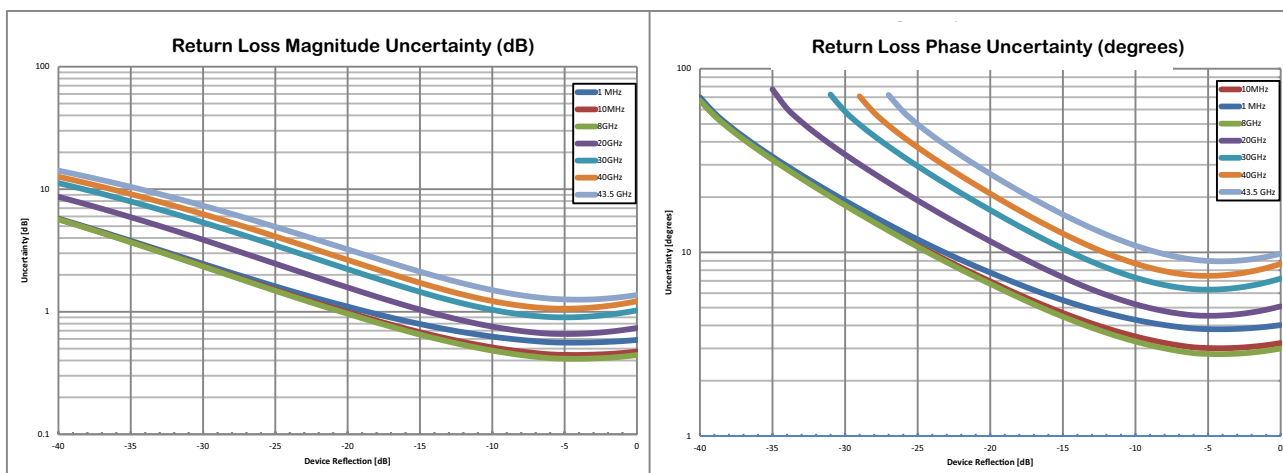



MS46131A-043 VNA System Performance with Manual Cal Kits

**Error-Corrected Specifications**


With calibration using TOSLK50A-43.5 or TOSLK50A-43.5 K type connector calibration kits with .s1p definitions.

| Frequency Range      | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|----------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 50 MHz      | ≥ 45             | ≥ 45              | ± 0.15                                |
| > 0.05 GHz to 10 GHz | ≥ 45             | ≥ 45              | ± 0.15                                |
| > 10 GHz to 20 GHz   | ≥ 45             | ≥ 45              | ± 0.15                                |
| > 20 GHz to 30 GHz   | ≥ 45             | ≥ 44              | ± 0.15                                |
| > 30 GHz to 40 GHz   | ≥ 45             | ≥ 42              | ± 0.15                                |
| > 40 GHz to 43.5 GHz | ≥ 42             | ≥ 41              | ± 0.2                                 |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

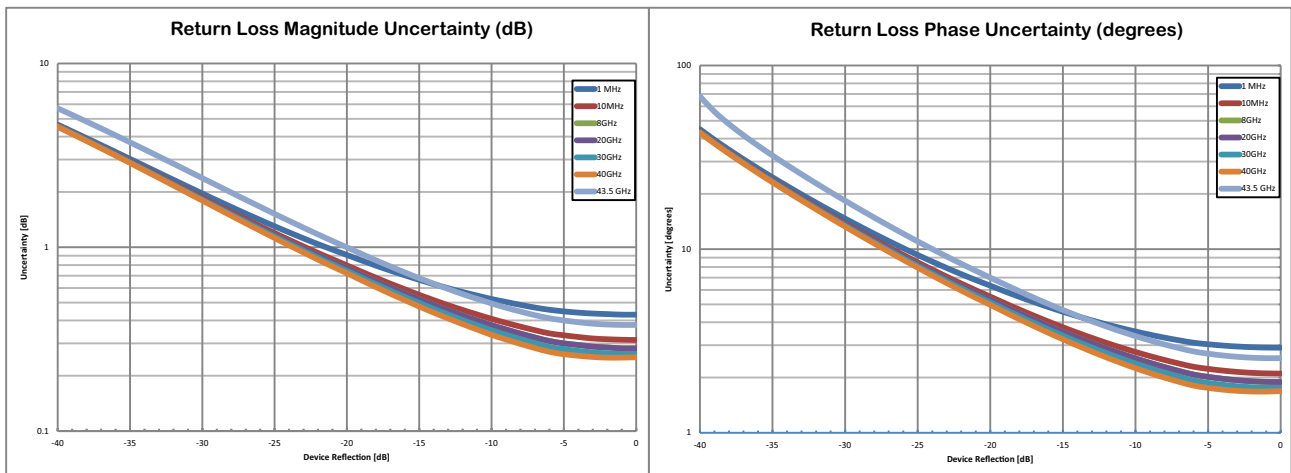

**MS46131A-010 VNA System Performance with SmartCal™**

**Error-Corrected Specifications**


With calibration using the 2-port MN25208A SmartCal™ automatic calibration kit with connector options MN25208A-001, -002, -003

| Frequency Range  | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 1 GHz   | ≥ 42             | ≥ 35              | ± 0.15                                |
| > 1 GHz to 5 GHz | ≥ 42             | ≥ 35              | ± 0.08                                |
| > 5GHz to 8 GHz  | ≥ 36             | ≥ 35              | ± 0.1                                 |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

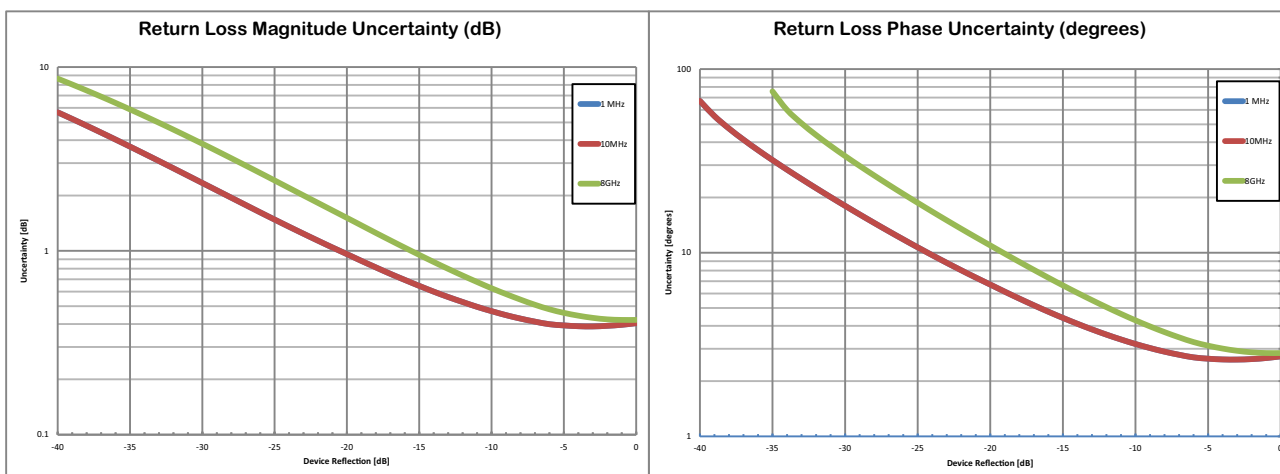

**MS46131A-010 VNA System Performance with SmartCal™**

**Error-Corrected Specifications**


With calibration using the 4-port MN25408A SmartCal™ automatic calibration kit with connector options MN25408A-001, -002, -003

| Frequency Range  | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 1 GHz   | ≥ 42             | ≥ 35              | ± 0.15                                |
| > 1 GHz to 5 GHz | ≥ 37             | ≥ 35              | ± 0.08                                |
| > 5 GHz to 8 GHz | ≥ 37             | ≥ 32              | ± 0.2                                 |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

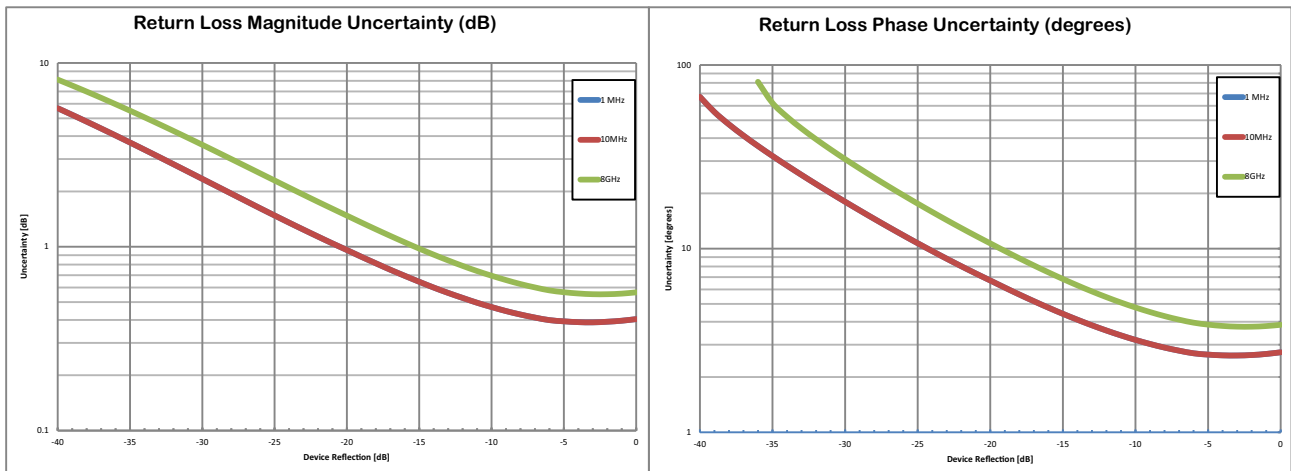

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™

**Error-Corrected Specifications**


With calibration using the 2-port MN25218A SmartCal™ automatic calibration kit.

| Frequency Range    | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|--------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 1 GHz     | ≥ 42             | ≥ 33              | ± 0.15                                |
| > 1 GHz to 10 GHz  | ≥ 37             | ≥ 33              | ± 0.15                                |
| > 10 GHz to 18 GHz | ≥ 37             | ≥ 33              | ± 0.15                                |
| > 18 GHz to 20 GHz | ≥ 37             | ≥ 33              | ± 0.20                                |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

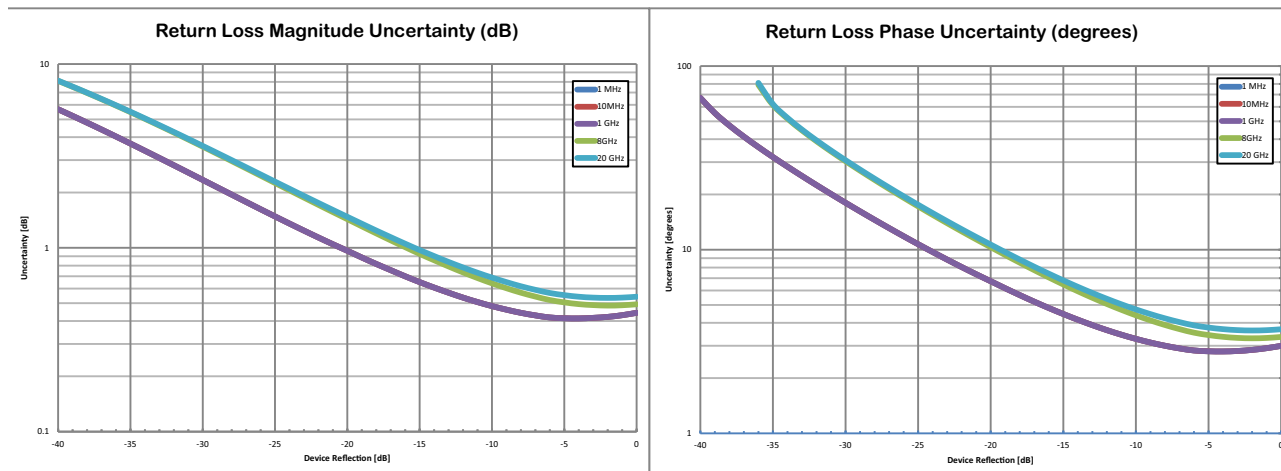

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™

**Error-Corrected Specifications**


With calibration using the 4-port MN25418A SmartCal™ automatic calibration kit.

| Frequency Range    | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|--------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to 10 MHz    | ≥ 40             | ≥ 31              | ± 0.15                                |
| > 10 MHz to 6 GHz  | ≥ 40             | ≥ 31              | ± 0.15                                |
| > 6 GHz to 18 GHz  | ≥ 35             | ≥ 31              | ± 0.20                                |
| > 18 GHz to 20 GHz | ≥ 35             | ≥ 31              | ± 0.20                                |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

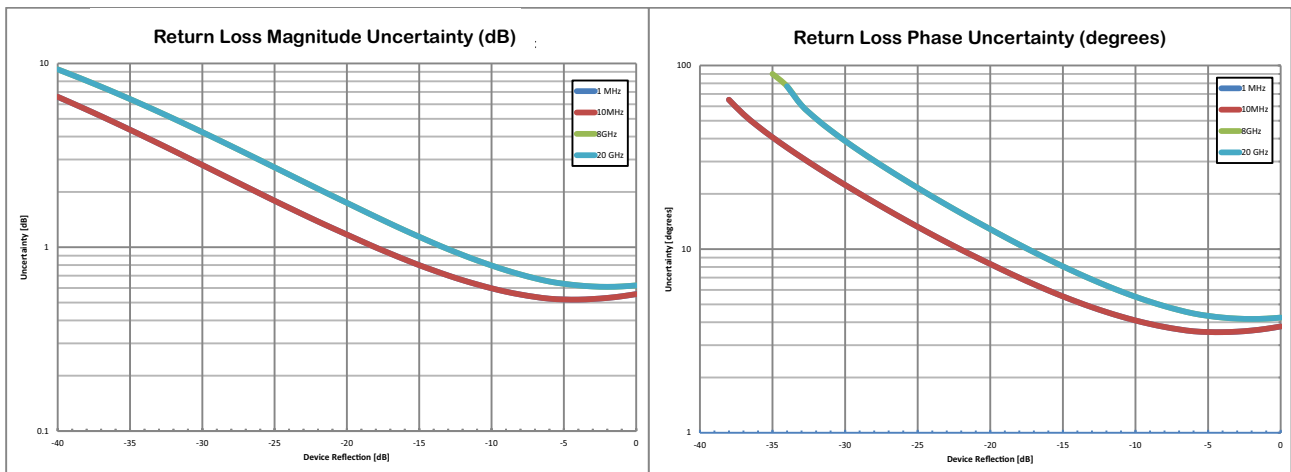

MS46131A-043 VNA System Performance with Precision AutoCal™

**Error-Corrected Specifications**


With calibration using the 36585K automatic calibration kit with type K connectors.

| Frequency Range    | Directivity (dB) | Source Match (dB) | Reflection Tracking <sup>a</sup> (dB) |
|--------------------|------------------|-------------------|---------------------------------------|
| 1 MHz to < 10 GHz  | ≥ 50             | ≥ 49              | ± 0.15                                |
| 10 GHz to < 20 GHz | ≥ 45             | ≥ 49              | ± 0.15                                |
| 20 GHz to < 30 GHz | ≥ 45             | ≥ 45              | ± 0.10                                |
| 30 GHz to 40 GHz   | ≥ 45             | ≥ 45              | ± 0.10                                |

a. Characteristic performance.

**Measurement Uncertainties**

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For reflection uncertainties, it is assumed that  $S_{21} = S_{12} = 0$ . All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com).

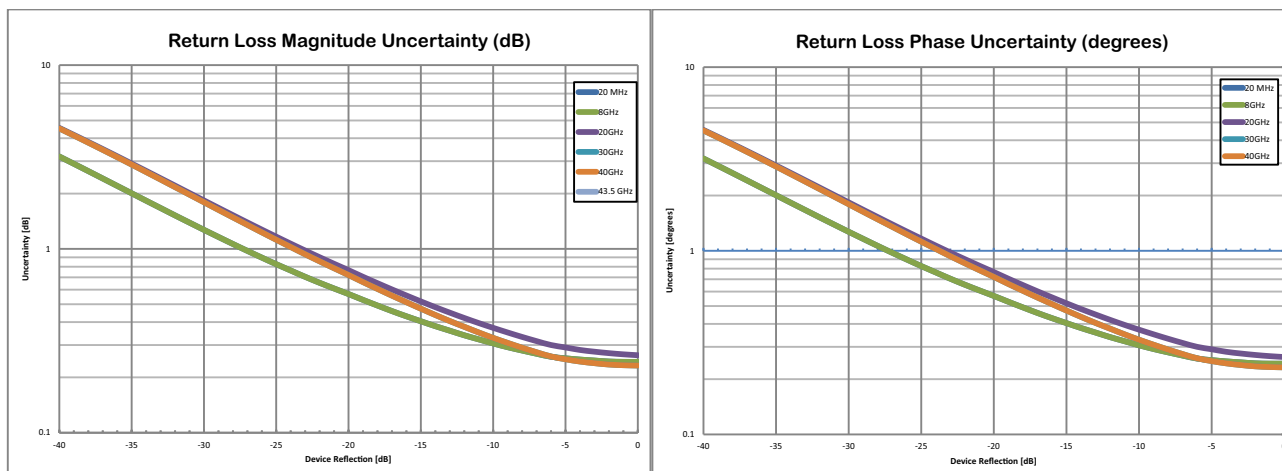

**Standard Capabilities**

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Frequencies</b>         |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| MS46131A-010                         | 1 MHz to 8 GHz                                                                                                                                                                                                                                                                                                                                                                                                        |
| MS46131A-020                         | 1 MHz to 20 GHz                                                                                                                                                                                                                                                                                                                                                                                                       |
| MS46131A-043                         | 1 MHz to 43.5 GHz                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Measurement Parameters</b>        |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 1-Port Measurements                  | S11 or any user-defined combination of a1, b1, 1                                                                                                                                                                                                                                                                                                                                                                      |
| Domains                              | Frequency Domain, Time (Distance) Domain (Option 2)                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Sweeps</b>                        |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Frequency Sweep Types                | Linear, Log, CW, or Segmented                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Display Graphs</b>                |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Single Rectilinear Graph Types       | Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, Impedance                                                                                                                                                                                                                                                                                                                                  |
| Dual Rectilinear Graph Types         | Log Mag and Phase, Linear Mag and Phase, Real and Imaginary                                                                                                                                                                                                                                                                                                                                                           |
| Circular Graph Types                 | Smith Chart (Impedance), Polar                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Measurements Data Points</b>      |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Maximum Data Points                  | 2 to 16,001 points                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Limit Lines</b>                   |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Limit Lines                          | Single or segmented. 2 limit lines per trace. 50 segments per trace.                                                                                                                                                                                                                                                                                                                                                  |
| Single Limit Readouts                | Uses interpolation to determine the intersection frequency.                                                                                                                                                                                                                                                                                                                                                           |
| Test Limits                          | Both single and segmented limits can be used for PASS/FAIL testing.                                                                                                                                                                                                                                                                                                                                                   |
| <b>Ripple Limit Lines</b>            |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Limit Lines                          | Single or segmented. 2 limit lines per trace. 50 segments per trace.                                                                                                                                                                                                                                                                                                                                                  |
| Ripple Value                         | Absolute Value or Margin                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Limits                          | Both single and segmented limits can be used for PASS/FAIL testing.                                                                                                                                                                                                                                                                                                                                                   |
| <b>Averaging</b>                     |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Point-by-Point                       | Point-by-point (default), maximum number of averages = 200                                                                                                                                                                                                                                                                                                                                                            |
| Sweep-by-Sweep                       | Sweep-by-sweep, maximum number of averages = 4096                                                                                                                                                                                                                                                                                                                                                                     |
| <b>IF Bandwidth</b>                  |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                      | 10, 20, 50, 70, 100, 200, 300, 500, 700 Hz<br>1, 2, 3, 5, 7, 10, 20, 30, 50, 70, 100, 200, 300 kHz                                                                                                                                                                                                                                                                                                                    |
| <b>Reference Plane</b>               |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Line Length or Time Delay            | The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.                                                                                                                                                                                                                                                                                                  |
| Dielectric Constants                 | Dielectric constants may be entered for different media so the length entry can be physically meaningful.                                                                                                                                                                                                                                                                                                             |
| Dispersion Modeling                  | Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities.                                                                                                                                                                                                                                                                                       |
| Attenuation                          | Attenuation (with frequency slope) and constant phase offsets can be entered to better describe any reference plane distortions. The frequency dependence exponent is changeable.                                                                                                                                                                                                                                     |
| Auto Modes                           | Automatic reference plane finding tools are available for phase alone or phase + magnitude. These routines do a fitting process on phase or phase and magnitude to estimate the reference plane location and enter correcting values.                                                                                                                                                                                 |
| De-embedding                         | For more complete reference plane manipulation, the full de-embedding system can also be used.                                                                                                                                                                                                                                                                                                                        |
| <b>Measurement Frequency Range</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Frequency Range Change               | Frequency range of the measurement can be narrowed within the calibration range without recalibration.                                                                                                                                                                                                                                                                                                                |
| CW Mode                              | CW mode permits single frequency measurements also without recalibration.                                                                                                                                                                                                                                                                                                                                             |
| Interpolation Not Activated          | If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.                                                                                                                                                                                                                                                                                                          |
| Interpolation Activated              | If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.                                                                                                                                                                                                                                                  |
| <b>Channels, Display, and Traces</b> |                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Channels and Traces                  | 16 channels, each with up to 16 traces                                                                                                                                                                                                                                                                                                                                                                                |
| Display Colors                       | Unlimited colors for data traces, memory, text, markers, graticules, and limit lines                                                                                                                                                                                                                                                                                                                                  |
| Trace Memory and Math                | Up to 20 trace memories per channel can be used to store trace measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.                                                                                                                                                                                       |
| Inter-trace Math                     | Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace. An equation editor mode is also available that allows the combination of trace data, trace memory and S-parameter data in more complex equations. Over 30 built-in functions are available. Simple editing tools and the ability to save/recall equations are also provided. |

**Scale Resolution**

|                  |                                               |
|------------------|-----------------------------------------------|
|                  | Minimum per division, varies with graph type. |
| Log Magnitude    | 0.001 dB                                      |
| Linear Magnitude | 10 $\mu$ U                                    |
| Phase            | 0.01°                                         |
| Group Delay      | 0.1 ps                                        |
| Time             | 0.0001 ps                                     |
| Distance         | 0.1 $\mu$ m                                   |
| SWR              | 10 $\mu$ U                                    |
| Power            | 0.01 dB                                       |

**Markers**

|                            |                                                                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Markers                    | 12 markers + 1 reference marker                                                                                                                              |
| Marker Coupling            | Coupled or decoupled                                                                                                                                         |
| Marker Overlay             | Display markers on active trace only or on all traces when multiple trace responses are present on the same trace                                            |
| Marker Data                | Data displayed in graph area or in table form                                                                                                                |
| Reference Marker           | Additional marker per trace for reference                                                                                                                    |
| Marker Statistics          | Mean, maximum, minimum, standard deviation                                                                                                                   |
| Marker Search and Tracking | Per trace or over a marker region<br>Search and/or track for minimum, maximum, peak, or target value. Multiple marker search ranges per trace are available. |

**Other**

|                        |                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------|
| Filter Parameters      | Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors. |
| S-Parameter Conversion | Z Impedance<br>Y Admittance<br>1/S                                                                         |



**Calibration and Correction Capabilities**

|                                               |  |                                                                                                                                                                                       |
|-----------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Calibration Methods</b>                    |  | Open-Short-Load (OSL)<br>Offset-Short (SSL)<br>Triple-Offset-Short (SSS)<br>SmartCal™<br>AutoCal™                                                                                     |
| <b>Correction Models</b>                      |  |                                                                                                                                                                                       |
| Standard Configuration                        |  | Reflection Frequency Response<br>1-Port S-parameter                                                                                                                                   |
| <b>Coefficients for Calibration Standards</b> |  | Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files.<br>Enter coefficients into user-defined locations.<br>Use complex load models. |
| <b>Interpolation</b>                          |  | Allows interpolation between calibration frequency points.                                                                                                                            |
| <b>Dispersion Compensation</b>                |  | Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip                                                                                  |
| <b>Embedding/De-embedding</b>                 |  | The MS46131A is equipped with an Embedding/De-embedding system.                                                                                                                       |
| De-embedding                                  |  | De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.               |
| Embedding                                     |  | Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.          |
| Multiple Networks                             |  | Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.                                                                       |
| <b>Impedance Conversion</b>                   |  | Allows entry of different reference impedances (complex values) for different ports                                                                                                   |

**Optional Capabilities**

|                                    |                                                                                                                                                                                                                                               |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Time Domain Measurements, Option 2 | Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate. |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Remote Operability**

ShockLine supports several remote operability options.

| Communication Type | Data Format                                                                                                                                                                                       | Performance                        | Description |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------|
| Drivers            | IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python programming environments. |                                    |             |
| Triggering         | Start Trigger                                                                                                                                                                                     | Software and Digital Edge          |             |
|                    | Input Range                                                                                                                                                                                       | +3.3 V logic level (+5 V tolerant) |             |
|                    | Minimum Trigger Width                                                                                                                                                                             | 50 ns                              |             |
|                    | Trigger Delay                                                                                                                                                                                     | 6 μs, typical                      |             |


Standard Device Connections




MS46131A Device Connections

|                               |                                                                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Port 1</b>            |                                                                                                                                                                            |
| MS46131A-010                  | N(f)                                                                                                                                                                       |
| MS46131A-020                  | Ruggedized K(m)                                                                                                                                                            |
| MS46131A-043                  | Ruggedized Extended-K™(m)                                                                                                                                                  |
| Damage Input Levels           | +23 dBm maximum, ±50 VDC maximum                                                                                                                                           |
| <b>USB Ports</b>              |                                                                                                                                                                            |
|                               | One Micro USB 2.0 port for connecting to an external PC controller.<br>For more than two MS46131A instruments on one PC, an externally powered USB 2.0 hub is recommended. |
| <b>Power Input</b>            |                                                                                                                                                                            |
|                               | Input connector for external power supply.                                                                                                                                 |
| <b>10 MHz In</b>              |                                                                                                                                                                            |
| Connector Type                | SMA(f)                                                                                                                                                                     |
| Signal                        | +0 dBm, typical; 50 Ω, nominal                                                                                                                                             |
| <b>External Trigger Input</b> |                                                                                                                                                                            |
| Connector Type                | SMA(f)                                                                                                                                                                     |
| Voltage Input                 | 0 to 3.3 V input (5 V tolerant)                                                                                                                                            |
| Impedance                     | High impedance (> 100 kΩ)                                                                                                                                                  |
| Pulse Width                   | 50 ns minimum input pulse width                                                                                                                                            |
| Trigger Delay                 | 6 μs typical                                                                                                                                                               |

MS46131A Top Panel

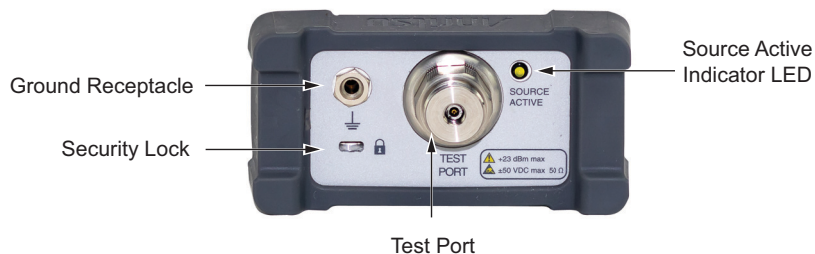

MS46131A Bottom Panel

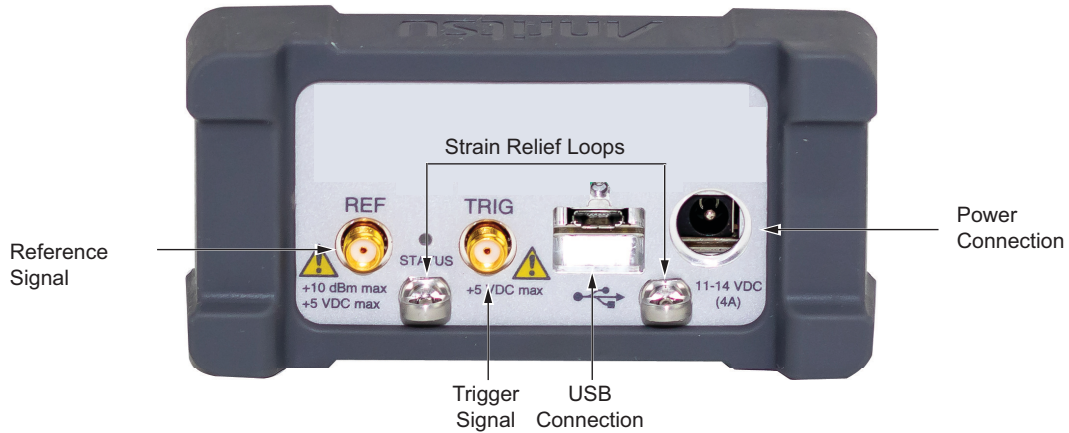

Recommended External PC Configuration

|         |                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU     | Intel® Core™ i5-6300U Processor                                                                                                                                |
| RAM     | 4 GB                                                                                                                                                           |
| Disk    | 120 GB                                                                                                                                                         |
| DirectX | Version 9 with Windows Display Driver Model (WDDM) installed<br>ShockLine software is compatible with Windows® 7,8, 8.1, or 10; 32 or 64 bit operating systems |
| USB     | One USB 2.0 (or higher) type A port per MS46131A used<br>To increase the number of USB ports available, an externally powered USB hub may also be used.        |

Mechanical

|                   |                                                |
|-------------------|------------------------------------------------|
| <b>Dimensions</b> | Dimensions listed are for the instrument body. |
| H x W x D         | 191.8 mm x 107 mm x 54 mm                      |
| <b>Weight</b>     | < 1 kg (< 2.2 lb), typical weight              |

Regulatory Compliance

|                           |                                                                                                                                                                                                                                                            |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| European Union            | EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11<br>Low Voltage Directive 2014/35/EU<br>Safety EN 61010-1:2010<br>RoHS Directive 2011/65/EU applies to instruments with CE marking placed on the market after July 22, 2017 |
| Australia and New Zealand | RCM AS/NZS 4417:2012                                                                                                                                                                                                                                       |
| South Korea               | KCC-REM-A21-0004                                                                                                                                                                                                                                           |

Environmental

|                             |                                          |
|-----------------------------|------------------------------------------|
|                             | MIL-PRF-28800F Class 2                   |
| Operating Temperature Range | -10 °C to 55 °C                          |
| Storage Temperature Range   | -51 °C to 71 °C                          |
| Maximum Relative Humidity   | 95 % RH at 30 °C, non-condensing         |
| Altitude                    | 4600 meters, operating and non-operating |

Warranty

|                                 |                                                       |
|---------------------------------|-------------------------------------------------------|
| Instrument and Built-In Options | 3 years from the date of shipment (standard warranty) |
| Calibration Kits                | Typically 1 year from the date of shipment            |
| Test Port Cables                | Typically 1 year from the date of shipment            |
| Warranty Options                | Additional warranty available                         |

## Ordering Information

|                                               |                                                                                                                                                       |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Instrument Models</b>                      |                                                                                                                                                       |
| Base Model                                    | MS46131A, ShockLine™ 1-Port Modular VNA                                                                                                               |
| Required Option                               | MS46131A-010, 1 MHz to 8 GHz, type N(f) port                                                                                                          |
| (Select one frequency option only)            | MS46131A-020, 1 MHz to 20 GHz, Ruggedized type K(m) port (compatible with 3.5 mm and SMA connectors)                                                  |
|                                               | MS46131A-043, 1 MHz to 43.5 GHz, Ruggedized type Extended-K™(m) port (compatible with standard K (2.92 mm), 3.5 mm, and SMA connectors)               |
| <b>Included Accessories</b>                   |                                                                                                                                                       |
|                                               | Each VNA comes with a set of included accessories                                                                                                     |
| User Documentation                            | Getting Started with Anritsu Flier, provides access to all ShockLine web content and services                                                         |
| Power                                         | 40-187-R, 12 V, 5 A Power supply (and power cord)                                                                                                     |
| USB Cable                                     | USB-A to Micro-B cable, 2000-1816-R, 1.8 m (6 ft)                                                                                                     |
| <b>VNA Options</b>                            |                                                                                                                                                       |
| Main Options                                  | MS46131A-002, Time Domain with Time Gating                                                                                                            |
| Calibration Options                           | MS46131A-098, Standard Calibration, ISO 17025 compliant, without data                                                                                 |
|                                               | MS46131A-099, Premium Calibration, ISO 17025 compliant, with data                                                                                     |
| <b>Precision Automatic Calibrator Modules</b> |                                                                                                                                                       |
| MN25208A                                      | 2-port USB SmartCal Module, 300 kHz to 8.5 GHz<br>(available with connector Options -001 N(f), -002 K(f), -003 3.5 mm(f))                             |
| MN25408A                                      | 4-port USB SmartCal Module, 300 kHz to 8.5 GHz<br>(available with connector Options -001 N(f), -002 K(f), -003 3.5 mm(f))                             |
| MN25218A <sup>1</sup>                         | 2-port USB SmartCal Module, 300 kHz to 20 GHz<br>(available with connector Option -002 K(f))                                                          |
| MN25418A                                      | 4-port USB SmartCal Module, 300 kHz to 20 GHz<br>(available with connector Option -002 K(f))                                                          |
| 36585K-2M                                     | K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m)                                                                                  |
| 36585K-2F                                     | K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f)                                                                                  |
| 36585K-2MF                                    | K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f)                                                                                  |
| 2000-1809-R                                   | Serial to USB Adapter (required for use with 36585 AutoCal module if control PC does not have a serial port)                                          |
| <b>Mechanical Calibration Kits</b>            |                                                                                                                                                       |
| 3650A                                         | SMA/3.5 mm Calibration Kit, Without Sliding Loads, DC to 26.5 GHz, 50 Ω                                                                               |
| 3650A-1                                       | SMA/3.5 mm Calibration Kit, With Sliding Loads, DC to 26.5 GHz, 50 Ω                                                                                  |
| 3652A                                         | K Connector Calibration Kit, Without Sliding Loads, DC to 40 GHz, 50 Ω                                                                                |
| 3652A-1                                       | K Connector Calibration Kit, With Sliding Loads, DC to 40 GHz, 50 Ω                                                                                   |
| 3653A                                         | N Connector Calibration Kit, Without Sliding Loads, DC to 18 GHz, 50 Ω                                                                                |
| OSLN50A-8                                     | Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω                                                                        |
| OSLNF50A-8                                    | Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω                                                                      |
| TOSLN50A-8                                    | Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω                                                                |
| TOSLNF50A-8                                   | Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω                                                              |
| OSLN50A-18                                    | Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω                                                                       |
| OSLNF50A-18                                   | Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω                                                                     |
| TOSLN50A-18                                   | Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω                                                               |
| TOSLNF50A-18                                  | Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω                                                             |
| TOSLK50A-20                                   | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω                                                               |
| TOSLKF50A-20                                  | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω                                                             |
| TOSLK50A-40                                   | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω                                                               |
| TOSLKF50A-40                                  | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω                                                             |
| TOSLK50A-43.5                                 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 43.5 GHz, 50 Ω<br>Includes .s1p files for data-based calibration support   |
| TOSLKF50A-43.5                                | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 43.5 GHz, 50 Ω<br>Includes .s1p files for data-based calibration support |

1. Applies to Rev 2 SmartCal Modules. MN25218A with serial numbers <1817999 operate from 1 MHz to 20 GHz.

**Adapters**

|           |                                                               |
|-----------|---------------------------------------------------------------|
| 1091-26-R | Adapter, SMA(m) to N(m), DC to 18 GHz, 50 Ω                   |
| 1091-27-R | Adapter, SMA(f) to N(m), DC to 18 GHz, 50 Ω                   |
| 1091-80-R | Adapter, SMA(m) to N(f), DC to 18 GHz, 50 Ω                   |
| 1091-81-R | Adapter, SMA(f) to N(f), DC to 18 GHz, 50 Ω                   |
| 71693-R   | Ruggedized adapter, K(f) to N(f), DC to 18 GHz, 50 Ω          |
| 33KK50C   | Calibration Grade Adapter, DC to 43.5 GHz, K(m) to K(m), 50 Ω |
| 33KKF50C  | Calibration Grade Adapter, DC to 43.5 GHz, K(m) to K(f), 50 Ω |
| 33KFKF50C | Calibration Grade Adapter, DC to 43.5 GHz, K(f) to K(f), 50 Ω |
| 34NK50    | Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω           |
| 34NKF50   | Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω           |
| 34NFK50   | Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω           |
| 34NFKF50  | Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω           |
| 34VFK50A  | Precision Adapter, DC to 43.5 GHz, V(f) - K(m), 50 Ω          |
| 34VFKF50A | Precision Adapter, DC to 43.5 GHz, V(f) - K(f), 50 Ω          |
| 34VK50A   | Precision Adapter, DC to 43.5 GHz, V(m) - K(m), 50 Ω          |
| 34VKF50A  | Precision Adapter, DC to 43.5 GHz, V(m) - K(f), 50 Ω          |
| K220B     | Precision Adapter, DC to 40 GHz, K(m) to K(m), 50 Ω           |
| K222B     | Precision Adapter, DC to 40 GHz, K(f) to K(f), 50 Ω           |
| K224B     | Precision Adapter, DC to 40 GHz, K(m) to K(f), 50 Ω           |

**Test Port Cables, Flexible, Ruggedized, Phase Stable**



15 Series Cable Example

|              |                                                                                           |
|--------------|-------------------------------------------------------------------------------------------|
| 15NNF50-1.0B | Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.0 m                              |
| 15NNF50-1.5B | Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.5 m                              |
| 15NN50-1.0B  | Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 1.0 m                              |
| 15LL50-1.0A  | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 Ω |
| 15LLF50-1.0A | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 Ω |
| 15KK50-1.0A  | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(m), 1.0 m, 50 Ω           |
| 15KKF50-1.0A | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m, 50 Ω           |

**Phase-Stable 18 GHz and 43.5 GHz Semi-Rigid Cables (Armored)**



3670 Series Cable Example

|            |                                                 |
|------------|-------------------------------------------------|
| 3670N50-1  | 0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω   |
| 3670NN50-1 | 0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω   |
| 3670N50-2  | 0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω   |
| 3670NN50-2 | 0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω   |
| 3670K50A-1 | 0.3 m (12"), DC to 43.5 GHz, K(f) to K(m), 50 Ω |
| 3670K50A-2 | 0.6 m (24"), DC to 43.5 GHz, K(f) to K(m), 50 Ω |

---

**Phase-Stable 20 GHz and 40 GHz Test Port Cables (Flexible)**


3671 Series Cable Example

|               |                                                                 |
|---------------|-----------------------------------------------------------------|
| 3671KFS50-60  | 60 cm (23.6 in), DC to 20 GHz, K (f) to 3.5 mm (m), 50 $\Omega$ |
| 3671KFSF50-60 | 60 cm (23.6 in), DC to 20 GHz, K (f) to 3.5 mm (f), 50 $\Omega$ |
| 3671KFKF50-60 | 60 cm (23.6 in), DC to 40 GHz, K (f) to K (f), 50 $\Omega$      |
| 3671KFK50-100 | 100 cm (39.4 in), DC to 40 GHz, K (f) to K (m), 50 $\Omega$     |

---

**Tools**

|                  |                                                                                                                               |
|------------------|-------------------------------------------------------------------------------------------------------------------------------|
| 01-201           | Torque End Wrench, 5/16 in, 0.9 N.m (8 lbf.in)<br>(for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors) |
| 01-203           | Torque End Wrench, 13/16 in, 0.9 N.m (8 lbf.in)<br>(for tightening ruggedized SMA, 2.4 mm, K and V test port connectors)      |
| 01-204           | End Wrench, 5/16 in, Universal, Circular, Open-ended<br>(for SMA, 3.5 mm, 2.4 mm, K, and V connectors)                        |
| More Information | Refer to our Precision RF & Microwave Components Catalog for descriptions of adapters and other components.                   |

Notes

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

**Anritsu Americas Sales Company**  
450 Century Parkway, Suite 190  
Allen, TX 75013, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Canada

**Anritsu Electronics Ltd.**  
700 Silver Seven Road, Suite 120  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

**Anritsu Eletronica Ltda.**  
Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP  
Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

**Anritsu Company, S.A. de C.V.**  
Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

**Anritsu EMEA L td.**  
200 Capability Green  
Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

**Anritsu S.A.**  
12 avenue du Québec, Bâtiment Iris 1- Silic 612,  
91140 Villebon-sur-Yvette, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

**Anritsu GmbH**  
Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

**Anritsu S.r.l.**  
Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

List Revision Date: 20191126

### • Sweden

**Anritsu AB**  
Isafjordsgatan 32C  
164 40 Kista, Sweden  
Phone: +46-8-534-707-00

### • Finland

**Anritsu AB**  
Teknobulevardi 3-5  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

**Anritsu A/S**  
c/o Regus Fairway, Arne Jacobsens Allé 7, 5th floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

### • Russia

**Anritsu EMEA Ltd.**  
**Representation Office in Russia**  
Tverskaya str. 16/2, bld. 1, 7th floor  
Moscow 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

**Anritsu EMEA Ltd.**  
**Representation Office in Spain**  
Paseo de la Castellana, 141.  
Planta 5, Edificio Cuzco IV  
28046, Madrid, Spain  
Phone: +34-91-572-6761

### • United Arab Emirates

**Anritsu EMEA Ltd.**  
**Dubai Liaison Office**  
902 Aurora Tower  
P O Box: 500311- Dubai Internet City  
Dubai, United Arab Emirates  
Phone: +971-4-3758479  
Fax: +971-4-4249036

### • India

**Anritsu India Private Limited**  
6th Floor, Indiqube ETA, No.38/4  
Adjacent to EMC2, Doddanekundi, Outer Ring Road  
Bengaluru 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

**Anritsu Pte. Ltd.**  
11 Chang Charn Road, #04-01, Shriro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • P.R. China (Shanghai)

**Anritsu (China) Co., Ltd.**  
Room 2701-2705, Tower A  
New Caohejing International Business Center  
No. 391 Gui Ping Road  
Shanghai 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

**Anritsu Company Ltd.**  
Unit 1006-7, 10/F.  
Greenfield Tower, Concordia Plaza  
No. 1 Science Museum Road  
Tsim Sha Tsui East, Kowloon  
Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

**Anritsu Corporation**  
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • South Korea

**Anritsu Corporation, Ltd.**  
5FL, 235 Pangyoeyeok-ro  
Bundang-gu, Seongnam-si  
Gyeonggi-do 13494, South Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

**Anritsu Pty. Ltd.**  
Unit 20, 21-35 Ricketts Road  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

**Anritsu Company Inc.**  
7F, No. 316, Sec. 1, NeiHu Rd. Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817